

## LIQUID CONCRETE REPAIR MIXING INSTRUCTIONS



1. Pry off top Red Cap



2. Remove tape band from middle of Cartridge



3. Insert long mixing rod into the top of the cartridge until it seats into the mixing wheel inside the Cartridge and turn clockwise until the wheel turns.



4. Firmly hold the Cartridge on a hard surface and pull up sharply to disengage the wheel from the tin-foil barrier.




5. Gently squeeze the cartridge to deform the tin-foil barrier.



6. Firmly hold the Cartridge on a hard surface and pump the mixing handle up and down with full strokes 15-20 times.



7. Unscrew the mixing rod and remove and discard.

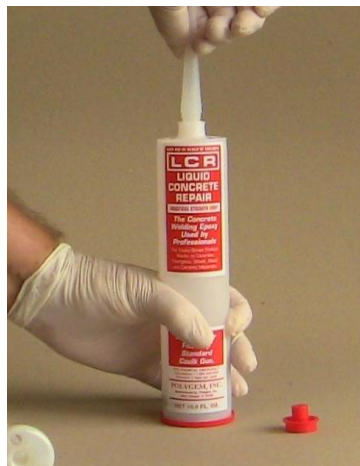

8. Screw in the dispensing nozzle until secure.



9. Remove red cap from bottom of cartridge and place into a standard caulking gun.